



...digital radio on the move



...digital radio on the move

RF AutoDAB Interface

Your AutoDAB is preloaded with the national stations listed...



www.AUTODAB.COM

Getting Started...

www.AUTODAB.COM

Designed and
Engineered
in the UK.



Designed and
Engineered
in the UK.

1



Notes

Volume control buttons work as per usual.

Step 2 - This step may already have been done by your installer. If this is the case move straight to Step 3 - 'Browsing through preset stations'

2

Getting Started - Initial setup of head unit

On first install the AutoDAB controller will default to transmitting on 87.8MHz. Tune the car radio to this frequency.

The car radio will display 'AutoDAB' and the audio message 'Scanning AutoDAB, please wait' will be heard.

The audio message repeats every 5 seconds.

Choose a preset on the car radio and store the AutoDAB frequency to it.

Pairing A remote control

To pair remote press 'A' and 'J' together for 2 seconds, a short beep will be heard confirming your device has been paired. Next press Menu button 'A' on the remote control to start the digital radio. After a short delay the car radio will display the first available Digital radio station found e.g. Absolute

After initial scanning is complete the audio message will change to "AutoDAB"

Press **A** to start AutoDAB.

After a short delay the car radio will display the first available DAB station found e.g. **Absolute**

*If you wish to tune to an FM Radio station, we recommend turning AutoDAB off by pressing **J***

17 Language

You can select the AutoDAB to be in one of five languages

18 Diagnostics


Diagnostics Menu for use if a problem occurs with your AutoDAB. You can also check your antenna's signal or show the current stations statistics.

19 Factory Reset

Restore AutoDAB tuner to factory settings. All presets/ stations will be deleted and AutoDAB will be reset to its original configuration.

20 Exit

Exit the DAB menu and returns to normal AutoDAB mode.

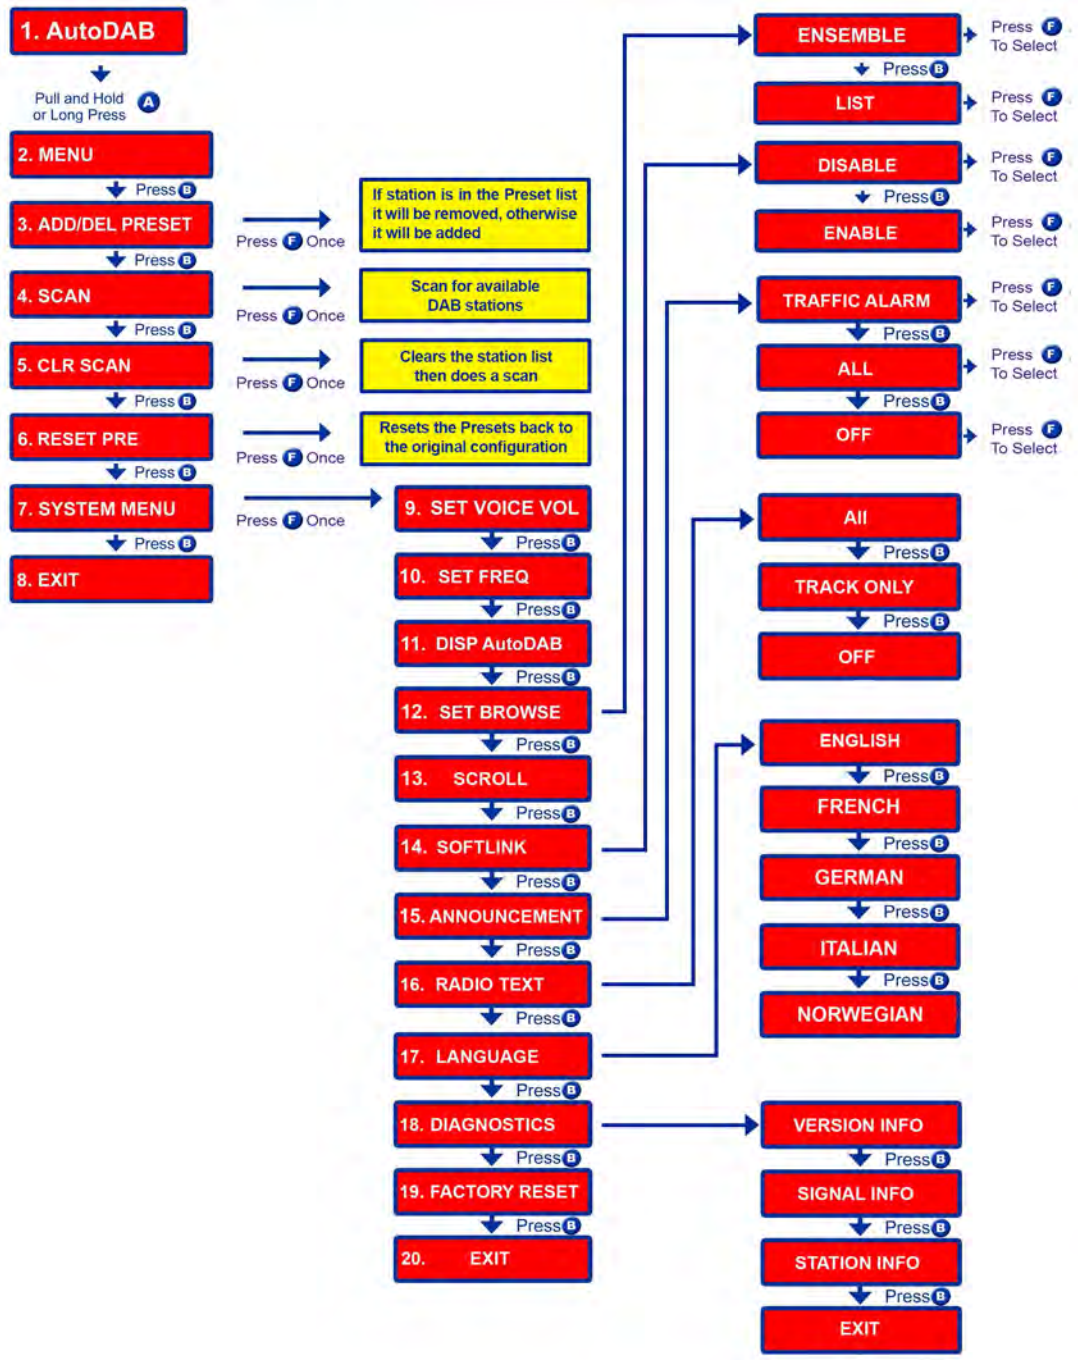

Menu Tree Key

1 AutoDAB

Normal DAB mode. DAB Station name is shown on head unit display.

2 Menu

Enter AutoDAB menu

3 Add/Del Presets

If the current tuned station is already in the AutoDAB preset list the option of Delete Preset will be offered to the user, if the current tuned station is not already in the AutoDAB preset list the option of Add Preset will be offered. (see adding presets)

4 Scan

AutoDAB will scan for all available stations in your area and up-date the station list accordingly. The display will show 'scanning' and you will be prompted "scanning AutoDAB please wait..." twice. After scanning is completed your display will tell you how many stations were found and how many are available for you to select.

5 Clear and Scan

Deletes existing station list and re-scans. All stations and presets that are no longer in range will be deleted.

6 Reset All Presets

Deletes all presets and restores them to the factory default.

7 System Menu

Allows access to the system menu of the AutoDAB.

8 Exit

Exits the AutoDAB menu and returns to normal DAB mode.

9 Set Voice Volume

The voice prompt can be increased by pressing button **B** and decreased by pressing button **H**. The voice volume level is displayed as a figure between 01 and 10 max.

10 Set Frequency

Allows the user to adjust the FM frequency which the AutoDAB broadcasts on. The default frequency is 87.8Mhz.

11 Disp AutoDAB

Forces the RDS to always display 'Autodab' when tuned to AutoDAB. Voice constantly says "AutoDAB...AutoDAB". This is to help the AutoDAB broadcast frequency.

12 Set Browse

AutoDAB can be navigated in either List mode (all available stations listed alphabetically A to Z) or in Ensemble mode (all stations listed by ensemble i.e a group of stations that are transmitted together).

13 Scroll

Enables or disables scrolling text. The radio text can be set to scroll on the display where you would normally see your DAB station. The display will show what you're listening to and whatever text the station transmits. This can, however, be difficult to read on some radios and be distracting to drivers. We, therefore, recommend that this feature is disabled.

14 Softlink

A station can have a link to another broadcaster's station with different content. Softlink enables the radio to follow the link.

15 Announcement

You can select to receive either all announcements, just traffic and alarm or turn them all off

16 Radio Text

If your head unit supports this feature you can display all the radio text the broadcaster sends, just track information or none at all.

3 Browsing through Preset Stations

Your AutoDAB will come with 21 Presets already loaded. To browse through your presets you will need to use the following commands:

- Press button **B** to move up the Preset list.
- Press button **H** to move down the Preset list.

4 Navigating the station list (Alphabetical)

Press **C** or **G** to move up or down the station list from the current tuned station.

Tip - If you are looking for a specific station, then go to the preset nearest to it in the alphabet and move up or down from there.

5 Adding/Deleting Presets

When you locate a station that you want to add or delete from your presets, simply press **E**. If the preset is not already in your preset list the station will be added, followed by a voice confirmation 'Preset Added'. If the preset is already included in your preset list then pressing **E** will delete the preset and the voice confirmation 'Preset Deleted' will be heard.

6 Scanning for Stations

To update the available stations in your current location

1. Press **D** to start scanning.
2. The audio message 'Scanning' repeats twice.
3. After a delay, typically 60 seconds, the car radio will display the total number of DAB stations found and the number of DAB stations currently available.
e.g. 63 stations have been found.
53 stations are available.

Note Found stations are all the stations that have been found in all scanned areas. Available stations are the stations that have been found in this scanned area.

4. After a short delay the car radio will display the first available DAB station name,
e.g. Absolute