



# Connects2Vision

## User Manual

### CAM-29

### Universal Brake Light Camera

For installation onto a flat surface at the rear of the vehicle.  
Vehicles must have one rear door w/ large window.

---

#### PRODUCT FEATURES:

Image Sensor: 1/3" CMOS

TV Lines: 600

Resolution: 756 x 504

Minimum Illumination: 0.1 Lux (0 Lux when IR on)

TV System: NTSC

Waterproof Rating: IP68

Infra-Red LED's: Yes

Viewing Angle: 170 Degrees

Enhanced Performance In Low Light: Yes

Video Output: 1.0V p-p 75ohm

Operating Voltage: 12V DC (Negative Ground)

Operating Temperature: -20 Degrees C to +70 Degrees C

---

#### DISCLAIMER:

##### Prior to Installation

Read the manual prior to installation. Technical knowledge is necessary for installation. Please ensure you use the correct tools to avoid damage to the vehicle or product.

***Connects2 can not be held responsible for the installation of this product.***

##### Technical Support

Connects2 want to provide a fast and suitable resolution should you encounter any technical issues. With this in mind, when contacting Connects2, try to provide as much Information as possible. This will speed up the process and help us to help you.

**Please use our dedicated online technical support centre: [support.connects2.com](http://support.connects2.com)**


- Add a third brake light and reversing camera to any vehicle
- Flush mount solution for a versatile and fast installation
- HD camera with night vision for excellent image clarity in all lighting conditions
- Connect to any monitor via AV input for a seamless connection to your system

## CONTENTS


- Universal Third Brake Light and Camera (with 4 pin cable)
- 15m Extension Lead (4 pin male to 4 pin female)
- 3M Adhesive Strip and Mounting Accessories
- RCA AV Cable
- Power Cable

## INSTALLATION EXAMPLES

### RCA connection diagram:

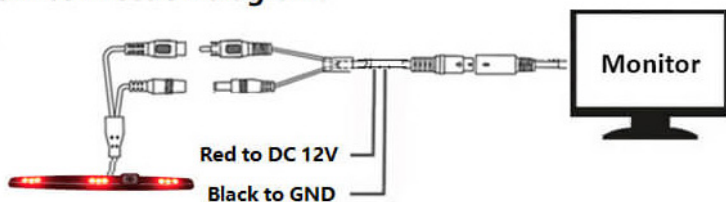

### 4Pin connection diagram:

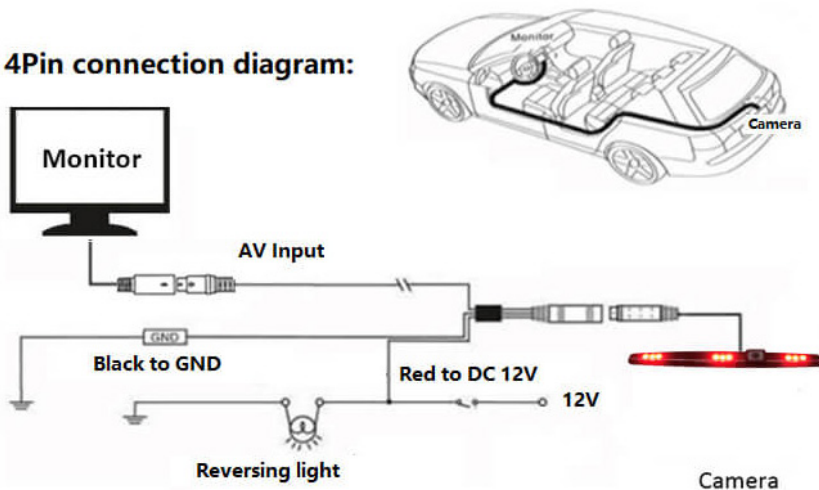

Subscribe to our YouTube Channel for installation guides and tips...  
[www.youtube.com/connects2](http://www.youtube.com/connects2)