



Connects2Vision

User Manual

CAM-43

Universal Reversing Camera

-
- **Universal application for installation into any vehicle**
 - **Compact squared housing ensures seamless fit**
 - **Removable parking guidelines**
 - **Automatic switching to camera feed upon activation of reverse gear**

PRODUCT FEATURES:

Image Sensor: 1/3" CMOS

TV Lines: 480

Resolution: 800 x 480

Minimum Illumination: 0.1 Lux

TV System: NTSC

Waterproof Rating: IP67

Viewing Angle: 170 Degrees (Horizontal) 90 Degrees (Vertical)

Parking Lines: Yes (Removable)

Enhanced Performance In Low Light: Yes

Video Output: 1.0V p-p 75ohm

Operating Voltage: 12-24V DC (Negative Ground)

Operating Temperature: -20 Degrees C to +75 Degrees C

DISCLAIMER:

Prior to Installation

Read the manual prior to installation. Technical knowledge is necessary for installation. Please ensure you use the correct tools to avoid damage to the vehicle or product.

Connects2 can not be held responsible for the installation of this product.


Technical Support

Connects2 want to provide a fast and suitable resolution should you encounter any technical issues. With this in mind, when contacting Connects2, try to provide as much information as possible. This will speed up the process and help us to help you.

Please use our dedicated online technical support centre: support.connects2.com

www.c2vision-eu.com

INSTALLATION

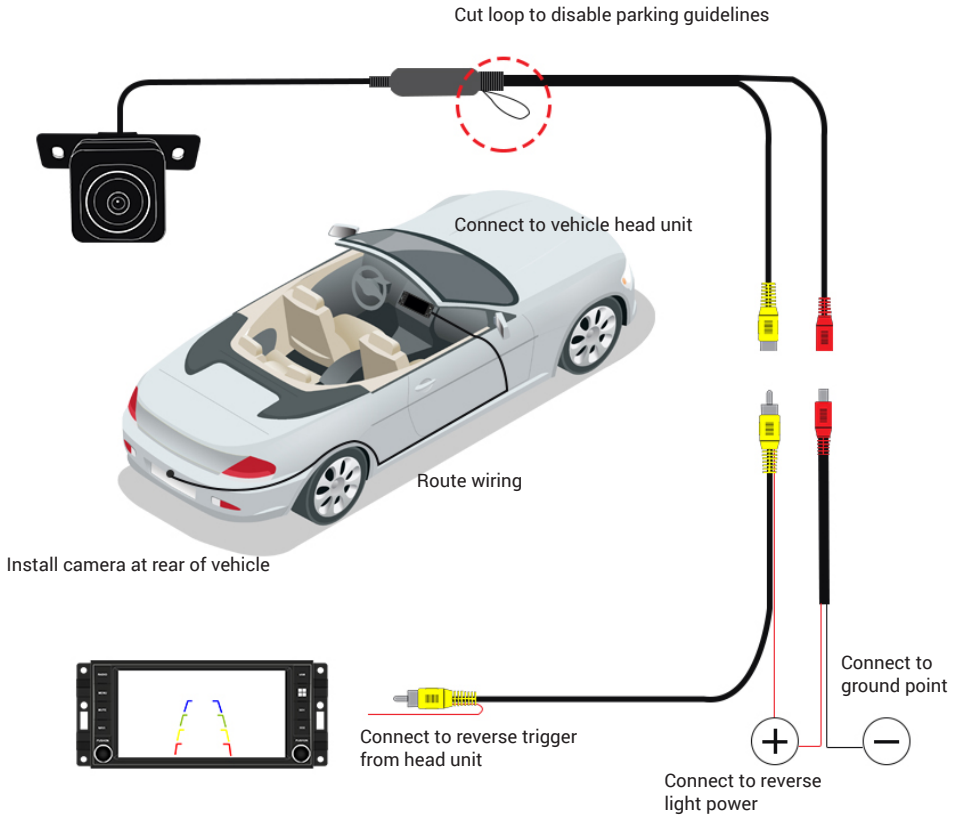

Subscribe to our YouTube Channel for installation guides and tips... www.youtube.com/connects2