





Adaptiv Mini Fitting & User Guide

CAM-FD1-AD

WWW.ADAPTIV-MUI.TIMFDIA.COM



Adaptiv Mini

Adaptiv Mini allows HDMI & Camera input to the OEM screen. Includes removable dynamic parking guidelines.



This plug and play Mini interface adds HDMI to connect your Apple or Android device, allowing you to mirror your smartphone display on the vehicle's original screen. Inputs for front and rear aftermarket cameras also come as standard with the Mini.

Application

For Ford vehicles with Sync3 systems and 8" display (dash embedded-style).

Note: Not for vehicles with newer Sync3.2 systems or tablet-style displays.

Kit Includes

Adaptiv Interface Vehicle Harness

Prior to installation


Read the manual prior to installation. Technical knowledge is necessary for installation. The place of installation must be free of moisture and away from heat sources. Connects2 cannot be held responsible for the installation of this product.


Technical Support

Connects2 want to provide a fast and suitable resolution should you encounter any technical issues. With this in mind, when contacting Connects2, try to provide as much Information as possible. This will speed up the process and help us to help you.

Please use our dedicated online technical support centre: support.connects2.com




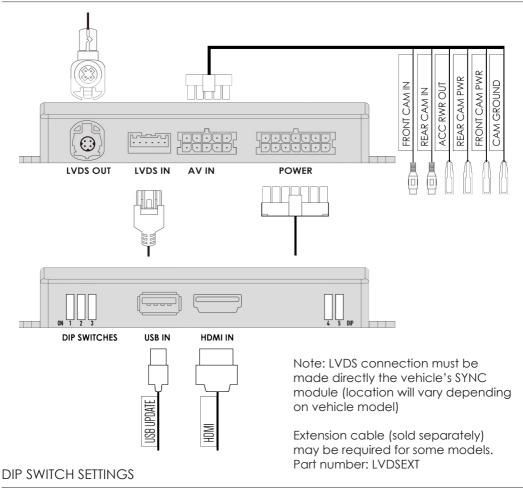




DIP 1 If the vehicle is

If the vehicle has OEM reverse camera (ON: YES OFF: NO)




DIP 3

If the vehicle has aftermarket reverse camera (ON: YES OFF: NO)



DIP 2

If the vehicle has aftermarket front camera (ON: YES OFF:NO)



DIP 4 OFF DIP 5

OFF





Button Configuration

Button 1 - Left arrow (steering wheel)

or SOUND button on OEM head unit

Button 2 - Right arrow (steering wheel)



HDMI Access

Connect the USB dongle supplied to the Sync USB input**. Select USB source from the OEM menu sources. The dongle will appear as 'USB AUX'.

Hold BUTTON 1 for 2 seconds to switch between OEM screen and Adaptiv Mini HDMI screen





Video In Motion Warning - 10mph

Hold **BUTTON 2** (or press top right corner of touchscreen) to disable the video in motion warning message

Rear and Front Camera Access

From either HDMI mode or OEM mode

- 1. Select reverse gear for reverse camera
- Deselect reverse gear will go to after market front camera (if DIP 2 ON)
 Press top right corner of screen to cancel front camera or drive over 10 MPH







Front Camera Access

Hold ${\bf BUTTON~2}$ for 2 seconds to enter the front camera screen (if DIP 2 is ON) or double press ${\bf SOUND}$ button on OEM head unit.

Dynamic Parking Guidelines

Set to On by default when reversing camera image is active. To toggle off/on, press and hold **BUTTON 1** for two seconds (or press top right corner of touchscreen) when reversing camera image is active.

View Version Number

Hold **BUTTON 1** for 8 seconds to enter firmware information screen

**Note that there may be a slight delay in HDMI audio lip sync, due to the USB audio buffer time of the OEM system. This is dependant on manufacturer original equipment specification.