





Adaptiv Mini Fittina & User Guide
CAM-MB7-AD

WWW.ADAPTIV-MUI.TIMFDIA.COM



Adaptiv Mini

Adaptiv Mini allows HDMI & Camera input to the OEM screen. Includes dynamic parking guidelines



This plug and play Mini interface adds HDMI to connect your Apple or Android device, allowing you to mirror your smartphone display on the vehicle's original screen. Inputs for front and rear aftermarket cameras also come as standard with the Mini.

Application

For Mercedes-Benz vehicles with NTG5.0 with 7" or 8" Display.

Kit Includes

Adaptiv Interface Vehicle Harness

Prior to installation


Read the manual prior to installation. Technical knowledge is necessary for installation. The place of installation must be free of moisture and away from heat sources. Connects2 cannot be held responsible for the installation of this product.

Technical Support


Connects2 want to provide a fast and suitable resolution should you encounter any technical issues. With this in mind, when contacting Connects2, try to provide as much Information as possible. This will speed up the process and help us to help you.

Please use our dedicated online technical support centre: support.connects2.com



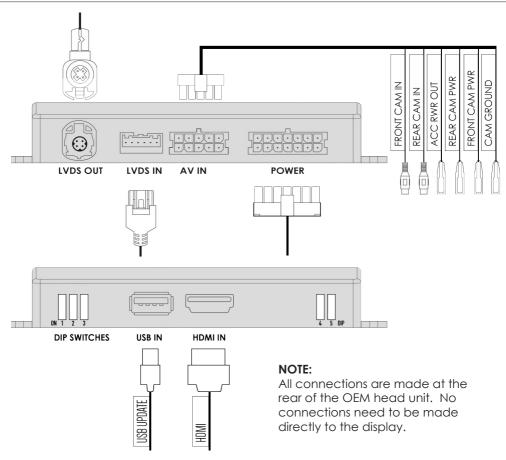


DIP SWITCH SETTINGS




DIP 1

If the vehicle has OEM reverse camera (ON: YES OFF: NO)




DIP₃

If the vehicle has aftermarket reverse camera (ON: YES OFF: NO)



DIP 2

If the vehicle has aftermarket front camera (ON: YES OFF:NO)



DIP 4

7" Display - OFF

8" Display - ON

DIP 5





Button Configuration

Button 1 - Back Arrow

HDMI Access

Connect the USB dongle supplied to the vehicle's USB input**. Select USB source from the OEM menu sources. The dongle will appear as 'USB AUX'.

Hold BUTTON 1 for 2 seconds to switch between OEM screen and Adaptiv Mini HDMI screen







Video In Motion Warning - 10 MPH

Double press **BUTTON 1** to disable the video in motion warning message

Rear and Front Camera Access

From either HDMI mode or OFM mode

- 1. Select reverse gear for reverse camera
- 2. Deselect reverse gear will go to after market front camera (if DIP 2 ON)
 To cancel front Camera Drive over 10 MPH







Front Camera Access

Double Press BUTTON 1 to enter the front camera screen (if DIP 2 is ON)

View Version Number

Hold **BUTTON 1** Button for 8 seconds to enter firmware information screen

Toggling Parking Guidelines On/Off

Hold **BUTTON 1** for 2 seconds whilst the camera image is displayed on screen

^{**}Note that there may be a slight delay in HDMI audio lip sync, due to the USB audio buffer time of the OEM system. This is dependant on manufacturer original equipment specification.