



Now with dynamic parking lines




Adaptiv Mini Fitting & User Guide

CAM-SK3-AD

WWW.ADAPTIV-MULTIMEDIA.COM

Adaptiv Mini

Adaptiv Mini allows HDMI and Camera input to the OEM screen. Includes removable dynamic parking guidelines.

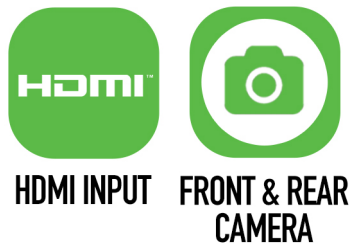

This plug and play, Mini interface adds HDMI to connect your Apple or Android device allowing you to display the contents on the vehicles original screen. Inputs for front and rear aftermarket cameras also come as standard with the Mini.

Application

For Skoda vehicles on MIB Platform with Composition Media/Amundsen/Bolero 5.8", 6.5" and 8" systems

Kit Includes

Adaptiv Interface, HDMI Adapter.


Prior to installation

Read the manual prior to installation. Technical knowledge is necessary for installation. The place of installation must be free of moisture and away from heat sources. Connects2 cannot be held responsible for the installation of this product.


Technical Support

Connects2 want to provide a fast and suitable resolution should you encounter any technical issues. With this in mind, when contacting Connects2, try to provide as much Information as possible. This will speed up the process and help us to help you.


Please use our dedicated online technical support centre: support.connects2.com

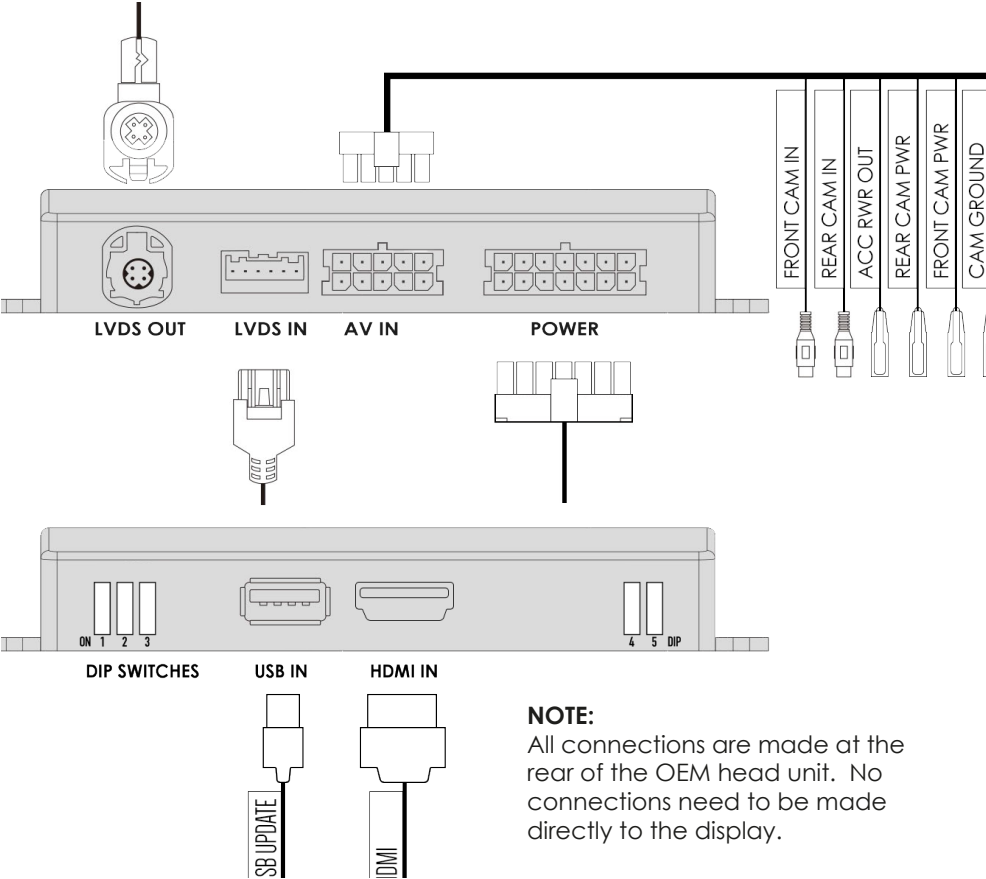


DIP SWITCH SETTINGS




DIP 1:
Whether the vehicle has OEM reverse camera (ON: YES OFF: NO)



DIP 3:
Whether the vehicle has aftermarket reverse camera (ON: YES OFF: NO)




DIP 2:
Whether the vehicle has aftermarket front camera (ON: YES OFF:NO)



DIP 4:
5.8" Screen - ON
6.5", 7" or 8" Screen - OFF
DIP 5:
OFF

HDMI Access

Select AUX In from the OEM Source Menu. Hold **MEDIA** Button for 2 seconds to switch between OEM screen and Adaptiv mini HDMI screen.

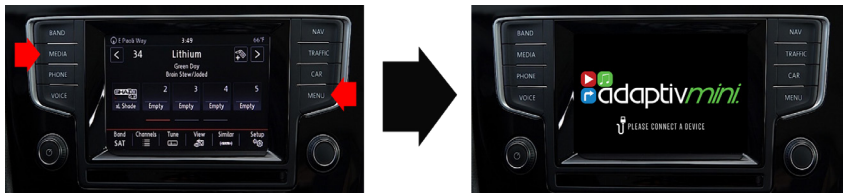

Video In Motion Warning - 10mph



Hold **MENU** Button (or press top right corner of touch screen) to disable the video in motion warning message

Rear and Front Camera Access

From either HDMI mode or OEM mode

1. Select reverse gear for reverse camera
2. Deselect reverse gear - will go to aftermarket front camera (if DIP 2 ON)
Press top right corner of screen to cancel front camera or drive over 10mph



Front Camera Access

Hold **MENU** Button for 2 seconds to enter the front camera screen (if DIP 2 is ON)

Dynamic Parking Guidelines

Set to On by default when reversing camera image is active. To toggle off/on, press and hold **MEDIA** Button for two seconds when reversing camera image is active.

View Version Number

Hold **MEDIA** Button for 8 seconds to enter firmware information Screen