

# Installation Manual Double DIN Kit




9. Attach metal mounting brackets to Double-DIN navigation

Connect all required circuit points

Place Double-DIN navigation on dashboard and fix it with OEM screws



10. Remove OEM panel holding hazard light switch and clock.

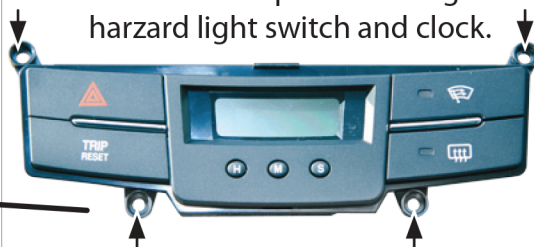

Mount OEM panel to facia plate *in case of inaccurate mounting position: cut upper part of OEM panel holder holes (see arrows) to a flat hole in order to get more flexibility for adjustment*



11. Connect harness for panel with hazard light switch

Place facia plate on dashboard

Reinstall everything in reverse order

12. Dashboard with installed Double-DIN navigation




## Installation Manual Double DIN Kit Double-DIN: CT23SY05 with pocket: CT24SY04

• **SsangYong Korando 2011->**

Compatible with these double DIN devices

### Double DIN Navigation

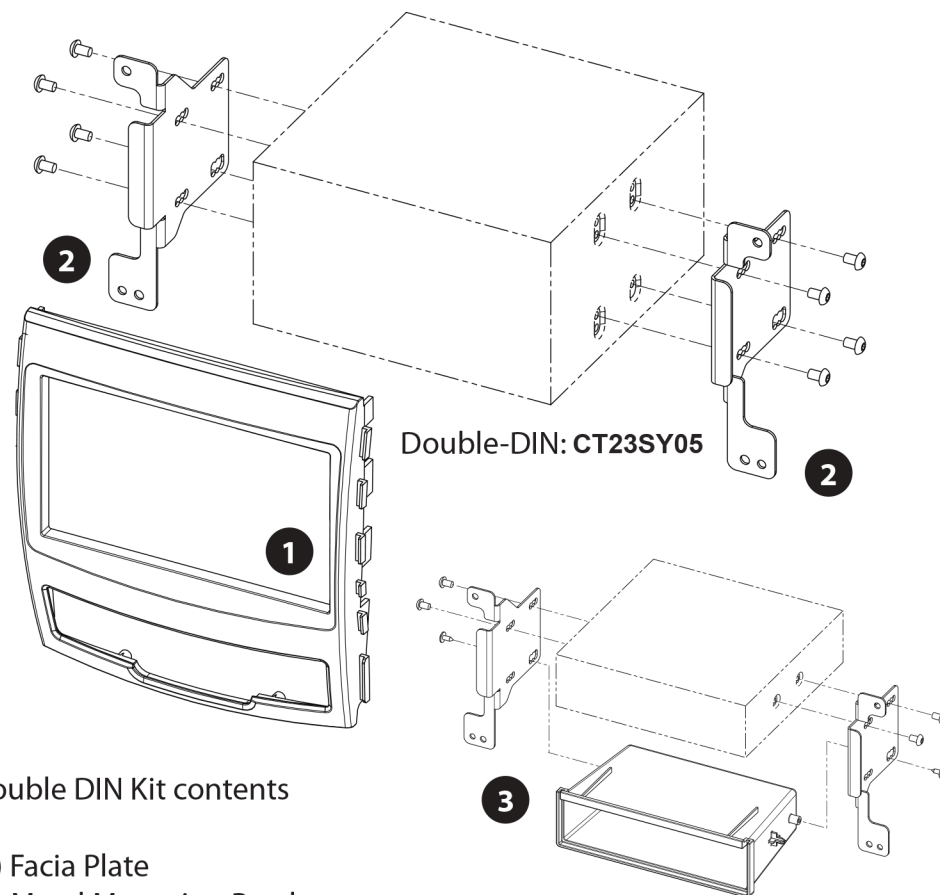

Double DIN Kit contents

- (1) Facia Plate
- (2) Metal Mounting Brackets
- (3) pocket ( part-no.: **CT23SY04** only!) with pocket: **CT23SY04**

All installation work must be performed by a qualified professional installer only.  
The manufacturer / dealer is not liable for any kind of incidental or indirect damages.

## Installation Manual Double DIN Kit



1. SsangYong Korando with OEM head unit



2. Open glove box - remove two screws beneath silver panel



3. Unclip and remove silver panels at left and right side carefully  
(we recommend using a plastic wedge)



4. Remove 2 screws beneath tachometer unit cover left and right side  
  
Pull tachometer unit cover towards your direction

## Installation Manual Double DIN Kit



5. Pull out air vent towards your direction



6. Open right door  
Remove side cover  
  
Remove 2 screws (see arrows)



7. Remove whole panel with integrated air vents



8. Remove screws of OEM-head unit. Remove OEM head unit by pulling it towards your direction  
  
Pull out radio harness carefully