




**Installation Manual**  
**Double DIN Installation Kit**  
Standard: CT23SZ02A

**Suzuki Swift Sport 2007 >**  
**Suzuki Ertiga 2012 >**  
**Suzuki Dzire 2008 - 2010**

Compatible with double DIN devices

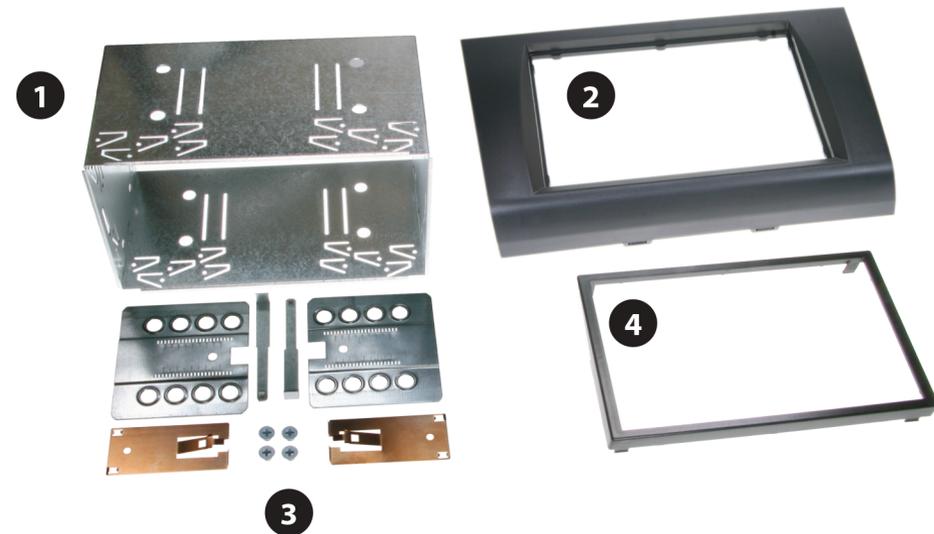

Double DIN kit. Table of content


- Metal frame (1)
- Facia plate (2)
- Installation kit (3)
- Trim frame (4)



1 Car with OEM head unit.




2 Remove dashboard cover under the steering wheel by pulling towards seat (see arrows).

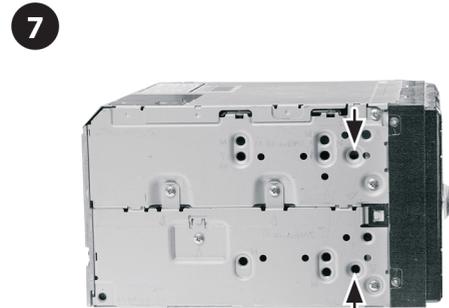

(sample photo)

7 Mount the metal brackets to the double DIN head unit.

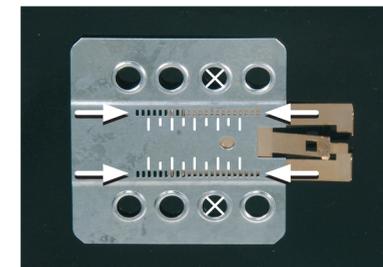

(sample photo)

The position of the copper coloured holder can be adjusted to your needs for perfect fit. (see sample)



3 Open the glove box and remove it by pulling towards seat.




4 Remove locknut from head unit. (passenger side underneath the dashboard)



5 Remove locknut from head unit (driver's side underneath the dashboard). Place the screw driver BEHIND the frame as shown on the picture



6 Remove OEM head unit.

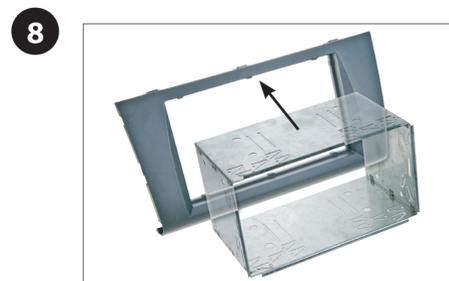

8 Place the Double-DIN facia plate at the dashboard, move metal bracket into the facia plate.



9 Connect alle required circuit points and wires. Push the double DIN head unit until it snaps in. Place plastic radio trim. Place back all panels in reverse order.

All installation work must be performed by a qualified professional installer only.  
The manufacturer / dealer is not liable for any kind of incidental or indirect damages.