

TV-Free

Video-in-motion Interface

CTVIMPE01

**For Citroen und Peugeot
RT3-N3 CAN, RT4, NG4 NaviDrive
and NG4 WipCom/WipNav
navigation systems**

Legal Information

By law, watching moving pictures while driving is prohibited, the driver must not be distracted. We do not accept any liability for material damage or personal injury resulting, directly or indirectly, from installation or operation of this product. This product should only be used while standing or to display fixed menus or rear-view-camera video when the vehicle is moving, for example the MP3 menu for DVD upgrades.

Contents

1. Prior to installation

- 1.1. Delivery contents
- 1.2. Check compatibility of vehicle and accessories
- 1.3. Setting the Dip-switches
- 1.4. Pin-assignments

2. Installation

- 2.1. Exception: Vehicles with RT3-N3 CAN and RT 4 without Source-button

3. Activation of the video-in-motion function

4. Specifications

1. Prior to installation

Read the manual prior to installation. Technical knowledge is necessary for installation. The place of installation must be free of moisture and away from heat sources.

1.1. Delivery contents

Take down the SW-version and HW-version of the interface-boxes, and store this manual for support purposes!

HW _____ SW _____



1.2. Check compatibility of vehicle and accessories

Requirements


Vehicle Citroen, Peugeot

Navigation RT3-N3 CAN, RT4, NG4 NaviDrive and WipCom/WipNav

Limitations

Vehicles without Source-button (only RT3-N3-CAN and RT4) The included green cable is used to activate the video-in-motion function (+12V = activated).

1.3. Setting the Dip-switches

All vehicles	Dip 1 OFF, Dip 2 OFF, Dip 3 OFF	
NG4 NaviDrive/WipCom	Dip 1 ON, Dip 2 OFF, Dip 3 OFF	


1.4. Pin-assignments

Pin-assignment vehicle connector

- White CAN High Pin 10
- Grey CAN Low Pin 13

Pin-assignment of the

- Red +12V battery power Pin 4
- Black Ground Pin 8
- Yellow CAN High Navi Pin 1
- Blue CAN Low Navi Pin 2
- Yellow/Black CAN High Vehicle Pin 5
- Blue/Black CAN Low Vehicle Pin 6

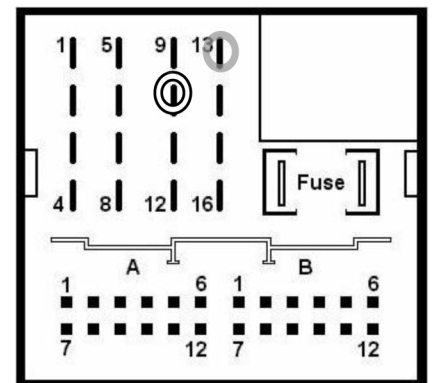

2. Installation

Switch off ignition and disconnect the vehicle's battery! If according to factory rules disconnecting the battery has to be avoided, it is usually sufficient to put the vehicle in sleep-mode. In case the sleep-mode does not show success, disconnect the battery with a resistor lead.

1. Using an unlocking device, unlock and pull out the navigation unit.

2. Disconnect the vehicle wiring harness Quadlock connector on the back of the navigation unit. The Quadlock connector consists of a number of chambers, the two 12pin inserts of which have to be disconnected from the Quadlock connector.




3. Connect the two 12pin inserts you have just disconnected from the vehicle wiring harness Quadlock connector to the interface Quadlock connector. Proceed by connecting the now fully commissioned interface Quadlock connector to the navigation unit. Then push the vehicle wiring harness Quadlock connector into the interface Quadlock socket.

2.1. Exception: Vehicles with RT3-N3 CAN and RT 4 without Source-button

On vehicles with RT3-N3 Can or RT 4 navigation system without Source-button the included green cable is used to activate the video-in-motion function.

1. Plug the green cable to pin 7 (free pin between black and black-blue cable) of the black 8pin connector of harness supplied (in the direction of the interface).

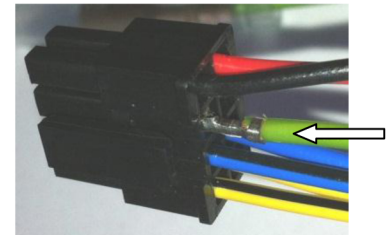

2. Connect a switch to the green cable and connect the green cable to +12V ACC.

- +12V = TV-Free is activated
- 0V = TV-Free is not activated

Note: As long as the video-in-motion function is activated, the **navigation** of the command **will NOT be working!**

3. Activation of the video-in-motion function

On vehicles with **RT3-N3 CAN/RT4** press the “SRC”-button on the steering-wheel for 3 seconds to activate/deactivate the video-in-motion function. When the ignition is off, the video-in-motion interface will be automatically disabled.

Note: *As long as the video-in-motion function is activated, the **navigation** of the command will **NOT** be working!*

On vehicles with **NG4 NaviDrive/WipCom** the video-in-motion function is activated permanently without disturbing the navigation performance.

4. Specifications

Operation voltage	10.5 – 14.8V
Stand-by power drain	>1mA
Operation power drain	~60mA
Power consumption	~0,72W
Temperature range	-30°C bis +80°C
Weight	44g
Measurements (box only) B x H x T	70 x 20 x 47 mm

