




Designed and
Engineered
in the UK. 

CTHUE-DG1 12V Ignition CAN-Bus solution for Dodge

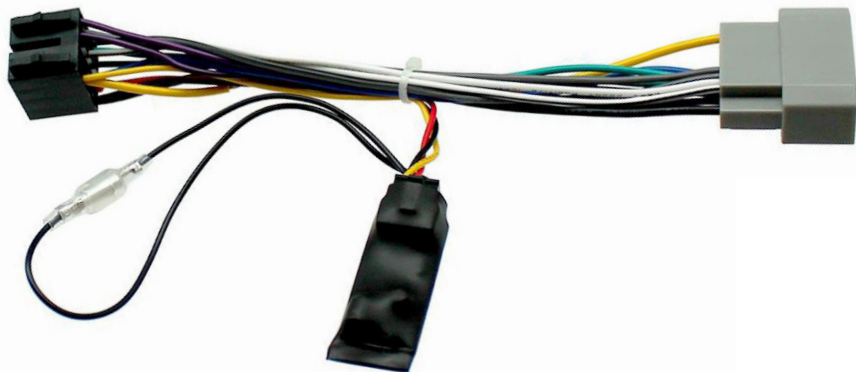

CAN-Connect is the leading CAN-Bus integration solutions for the automotive industry.



CAN-Connect ist die führende CAN-Bus-Integrationslösung für die Automobilindustrie.



CAN-Connect son las soluciones de integración CAN-Bus líderes en la industria del automóvil.



CAN-Connect est le leader des solutions d'intégration Can-bus de l'industrie automobile.



CAN-Connect è la principale soluzione di integrazione CAN-BUS nel settore automobilistico.

Technical Support?

for technical support please use our
dedicated system support.connects2.com

Connects2.com



...connecting to the aftermarket

DISCLAIMER

The information provided in this document is subject to change without notice due to manufacturer changes and/or improvements to the product/s. This instruction manual is based on documented data and research. The manufacturer of this product cannot be held responsible for any changes made to the vehicle by the manufacturer or damages that may occur through the installation of this product in accordance with the steps outlined herein.

Features

- Plug & play solution - head unit replacement made easy
- Generates 12V Ignition feed
- Includes simple programming connection for quick learning process

This particular product supports the following outputs:



Wire Colours

Speed Pulse	Pink / Rosa / Rosado / Rose / Rosa
Illumination	Orange / Orange / Naranja / Orange / Arancia
Ignition 12V	Red / Rot / Rojo / Rouge / Rosso
Amp/Antenna Remote	Blue / Blau / Azul / Bleu / Blu

Product Details

<u>Manufacturer</u>	<u>Model</u>	<u>Year(s)</u>	<u>Connector</u>
Dodge	Avenger	2007 >	OEM Specific
Dodge	Caliber	2009 >	OEM Specific
Dodge	Charger	2008 >	OEM Specific
Dodge	Dakota	2008 >	OEM Specific
Dodge	Durango	2008 - 2015	OEM Specific
Dodge	Grand-Caravan	2007 - 2015	OEM Specific
Dodge	Journey	2008 >	OEM Specific
Dodge	Magnum	2008 - 2008	OEM Specific
Dodge	Nitro	2008 >	OEM Specific
Dodge	Ram	2008 >	OEM Specific

Programming Wire

Each IGNI interface comes with a programming wire.
This wire is used to configure the 12V Ignition feed for your new head unit.


This should not be connected to anything other than itself.



Installation


Step 1.

Remove OEM head unit following manufacturers instruction.

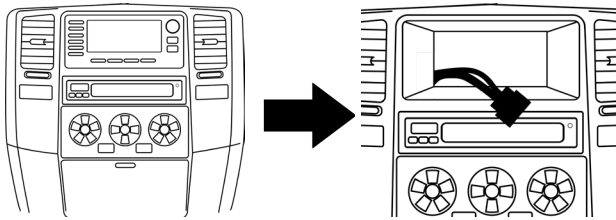

Step 2.

Connect vehicle specific connector to OEM harness. Connect ISO connector to aftermarket head unit.

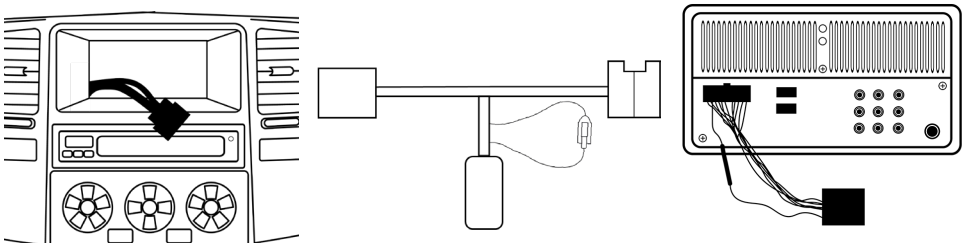


*Connect required analogue flying wires to aftermarket head unit using colour table.

Step 3.


When connected correctly, start the engine. Disconnect the **'programming wire'**. Wait roughly 5 seconds and re-connect the wire. This will start the learning process - the 12V Ignition feature will activate during this time.

Wait 1 minute, then turn engine off. The ignition output should turn off after 40 seconds.

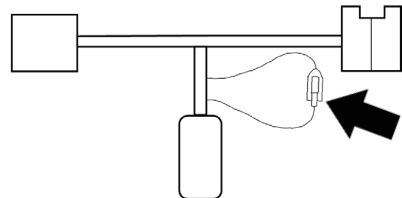

Step 4.

When connected appropriately and tested, re-assemble dashboard with aftermarket head unit.



Notes

[illegible]

FOLLOW US ON SOCIAL MEDIA
for all the latest updates



/CONNECTS2
Watch us on
YouTube



[/CONNECTS2](#)
Like us on
facebook



CONNECTS2LTD
Follow us on
instagram



@CONNECTS2
Follow us on
twitter



CONNECTS2LTD
Follow us on
linkedin



CONNECTS2BLOG.COM
Follow our blog on
wordpress