




CTSLR011.2

Land Rover Steering Wheel Control Interface

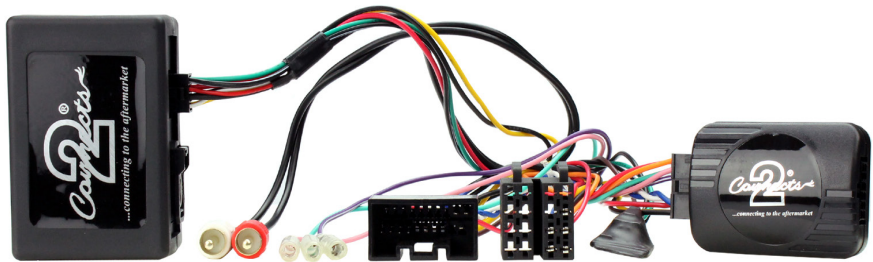

Vehicle Application

Land Rover Discovery (IV) 2009 - 2011
Land Rover Range Rover Sport 2010 - 2013

for MOST 25 fibre amplified systems

Key Features

- Retains Steering Wheel Controls (if equipped)
 - Retains OEM Phone Buttons (if equipped)
 - Retains MOST 25 Fibre Amplified System
- Provides Speed Pulse, Park Brake & Reverse Gear Feeds

www.connects2.com

Designed and
Engineered
in the UK.



The information provided in this document is subject to change without notice due to manufacturer changes and/or improvements to the product/s.

V1. 02/21

ABOUT THIS PRODUCT

CTSLR011.2

CAN-Bus Steering Wheel Control Interface for select Land Rover vehicles with MOST 25 fibre amplified systems.

NB: After installation, original nav display will only show the 'Land Rover' logo. Time will be displayed on the aftermarket stereo.

WIRING COLOUR CODES

Purple	Right Rear Speaker +	Yellow	Permanent 12V
Purple/Black	Right Rear Speaker -	Black	Ground
Green	Left Rear Speaker +	Red	Ignition 12V
Green/Black	Left Rear Speaker -	Pink	Speed Pulse
Grey	Right Front Speaker +	Green	Park Brake
Grey/Black	Right Front Speaker -	Purple/White	Reverse Gear
White	Left Front Speaker +		
White/Black	Left Front Speaker -		

PRIOR TO INSTALLATION

*Read the manual prior to installation. Technical knowledge is necessary for installation. The place of installation must be free of moisture and away from heat sources. Please ensure that the correct tools are using during the installation to avoid damage to the vehicle or product. **Connects2 can not be held responsible for the installation of this product.***

TECHNICAL SUPPORT

Connects2 Ltd. want to provide a fast and suitable resolution to any problems encountered during installation of this product. To get in touch with our dedicated technical support team, please fill in a ticket at support.connects2.com and provide as much information as possible.

FOLLOW US ON SOCIAL MEDIA

for all the latest updates



/CONNECTS2
Watch us on
YouTube



/CONNECTS2
Like us on
facebook



CONNECTS2LTD
Follow us on
instagram



@CONNECTS2
Follow us on
twitter




CONNECTS2LTD
Follow us on
linkedin



CONNECTS2BLOG.COM
Follow our blog on
wordpress

FITTING GUIDE


1. Remove and disconnect the original head unit.
2. Connect the 12 way molex connector of the head unit patch lead (supplied separately) to the interface.

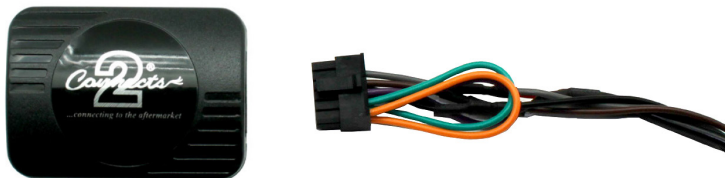

3. Connect the opposite end of head unit patch lead to the head unit steering wheel control input on the back of the aftermarket head unit.

NB: This may be a 3.5mm jack plug or a wire input depending upon the head unit brand being fitted. Please see the head unit installation manual for further information on where to connect.


Important: This step must be completed before connecting power to the interface. Failure to so do may result in no steering wheel control function.

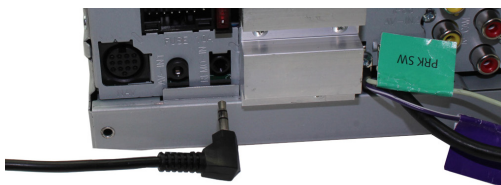

4. Connect the 14 way molex connector to the interface



5. Connect the male power/speaker ISO harness to the female power/speaker ISO harness from the aftermarket head unit. For aftermarket head units without an ISO connector, please refer to "Wiring Colour Codes" on Pg. 2.

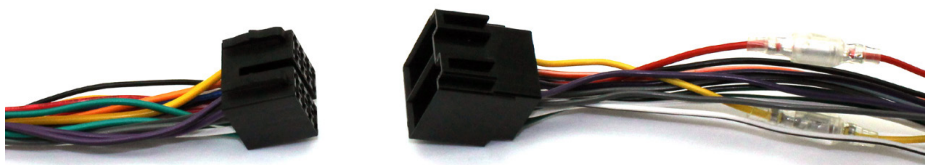

FITTING GUIDE

6. Connect the red/white RCA connectors to the inputs on the aftermarket stereo

7. Plug the fibre amp cable originally designated for the head unit into the CTSR011.2 amp retention interface.

NB: Make sure that the dust cover is removed from the interface before completing this Step.

8. Connect the female vehicle specific connectors on the harness to the male vehicle connector from the vehicle. Test head unit for correct operation.

STEERING WHEEL CONTROL FUNCTIONALITY

