




Steering Wheel Control Interface for Isuzu Vehicles

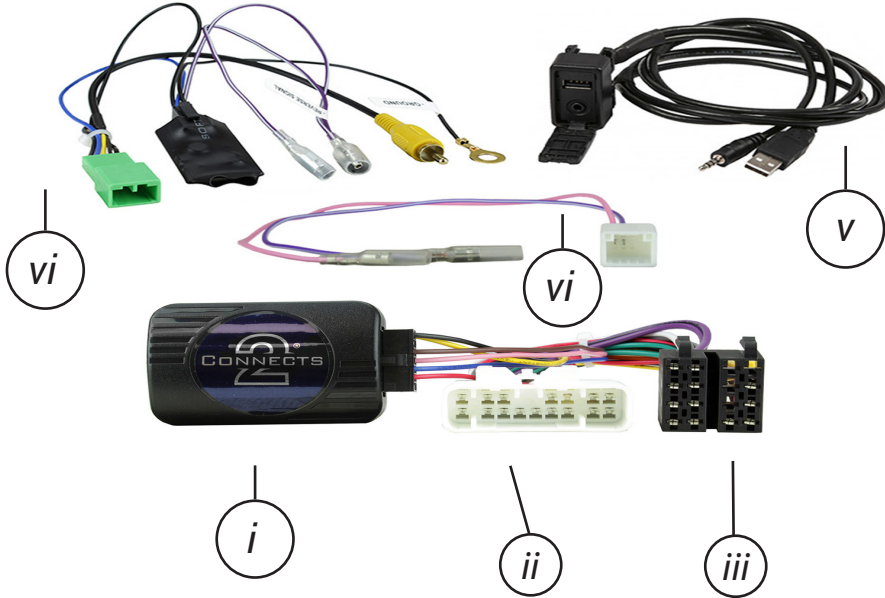

- i. Interface Box*
- ii. Vehicle Specific Connector*
- iii. Male ISO Connector*
- iv. Reverse Camera Retention*
- v. USB and AUX Retention*
- vi. Reverse Trigger and Speed Pulse*

Designed and
Engineered
in the UK. 

APPLICATION

Note: Application data is subject to change at any time

Isuzu D-Max 2020 - UP

FEATURES

- **Retains Factory Steering Wheel Control Functions**
- **Retains Factory Phone Buttons**
- **Retains Factory Reverse Camera**
- **Retains Factory USB and AUX**
- **Generates Reverse Switch Output and Speed Pulse**

DISCLAIMER

The information provided in this document is subject to change without notice due to manufacturer changes and/or improvements to the product/s. This instruction manual is based on documented data and research. The manufacturer of this product cannot be held responsible for any changes made to the vehicle by the manufacturer or damages that may occur through the installation of this product in accordance with the steps outlined herein.

PRODUCT INFORMATION

The CTSIZ007.2 is an analogue interface for the Isuzu D-Max. This interface helps retain the steering wheel controls and factory phone button functionality of the vehicle (if vehicle is equipped). This harness features a plug-and-play harness with a dedicated vehicle specific connector.

WIRING KEY

IN WIRING HARNESS


Purple	Right Rear Speaker +	Yellow	Permanent 12V
Purple/Black	Right Rear Speaker -	Black	Ground
Green	Left Rear Speaker +	Red	Ignition 12V
Green/Black	Left Rear Speaker -	Orange	Illumination
Grey	Right Front Speaker +		
Grey/Black	Right Front Speaker -		
White	Left Front Speaker +		
White/Black	Left Front Speaker -		

ADDITIONAL CONNECTIONS

None

STEERING WHEEL CONTROL FUNCTIONALITY

The following diagram, though based on careful research, is an example only. Individual steering wheel control configurations may differ.

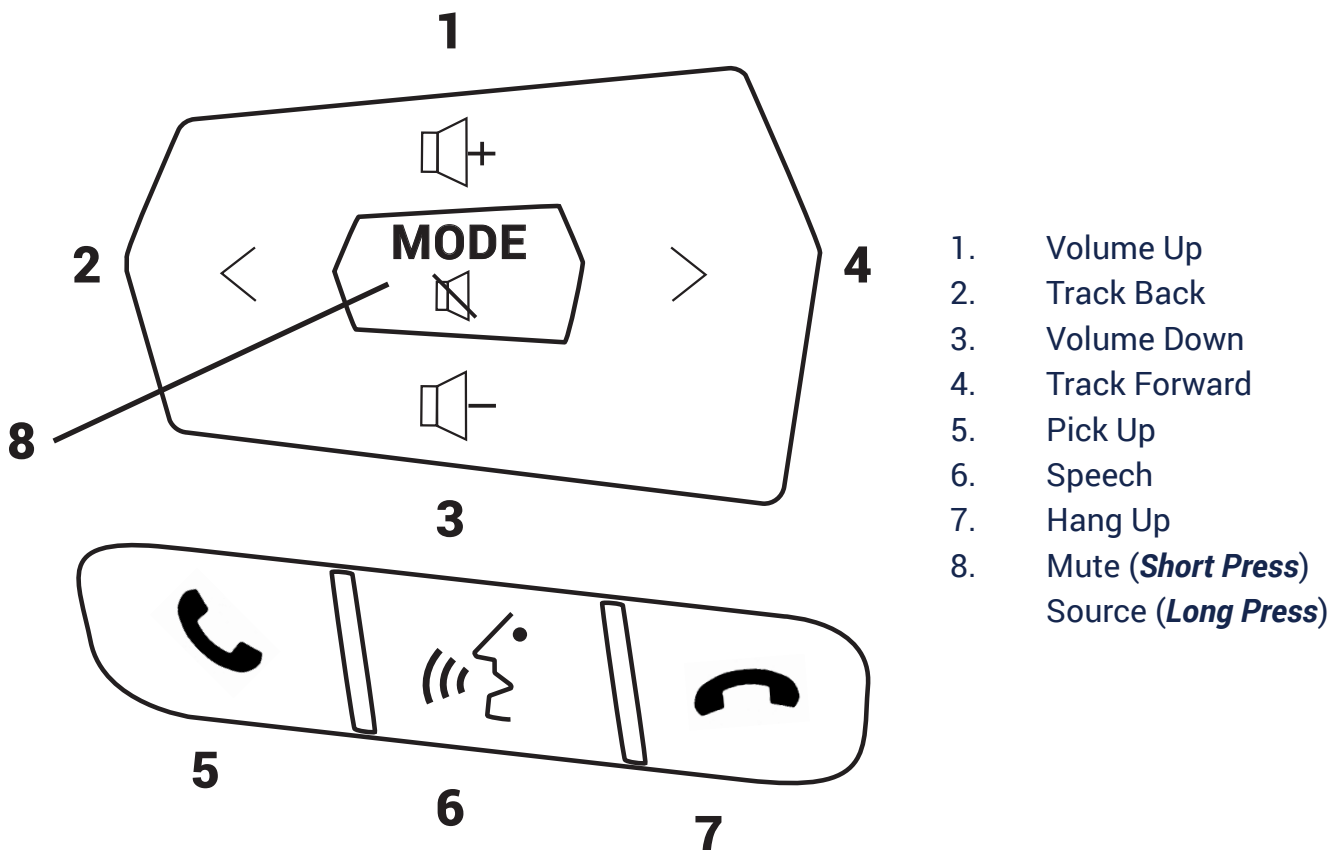

PRIOR TO INSTALLATION

*Read the manual prior to installation. Technical knowledge is necessary for installation. The place of installation must be free of moisture and away from heat sources. Please ensure that the correct tools are used during the installation to avoid damage to the vehicle or product. **Connects2 can not be held responsible for the installation of this product.***

INSTALLATION GUIDE

See wiring diagram on Pg.4 for more information

Before installing the interface, the factory stereo must be removed and disconnected. To do this, please consult the vehicle owner's manual/handbook or contact a fitting professional.

A stereo connection (patch) lead is also required for the installation of this interface (supplied separately). Please ensure that you have the correct lead before proceeding. For universal patch leads, prepare the wiring loops in accordance with the instruction manual supplied with the product before installation.

1. Connect the 12 Pin connector from the stereo connection (patch) lead to the interface box
2. Connect the opposite end of the stereo connection (patch) lead to the steering wheel control input on the back of the aftermarket stereo

NOTE: This may be a 3.5mm jack connector or a wired input depending on the brand of aftermarket stereo being fitted. Please consult the aftermarket stereo installation manual for further information on where to make the connection

IMPORTANT: THIS STEP MUST BE COMPLETED BEFORE CONNECTING POWER TO THE INTERFACE. FAILURE TO DO SO MAY RESULT IN A LACK OF FUNCTIONALITY AND THE NEED TO RE-INSTALL THE PRODUCT.

3. Connect the 14 Pin connector from supplied wiring loom to the interface box
4. Connect the power/speaker ISO connector to the power/speaker ISO connector at the rear of the aftermarket stereo.

NOTE: For aftermarket stereos which do not have an ISO connector, please see "Wiring Key" on Pg.2 for information on which wires to connect


5. Connect the 16 pin vehicle specific connector to the vehicles main power connector.
6. Test stereo and steering wheel control functionality for correct operation before reassembling the vehicle dashboard. If steering wheel control functions are unresponsive, please uninstall the interface and wiring and reinstall carefully in accordance with the above steps.

*For further help, please contact and fill out a support ticket with the full details of your issue at:
support.connects2.com/tickets/technical*

WIRING DIAGRAM


Vehicle Specific Connector [16 Pin]

Connect to OEM connector from vehicle




ISO Connector

Connect to aftermarket stereo



Main Wiring Loom Connector [14 Pin]

Connect to Interface Box



Interface Box



Stereo Connection (Patch) Lead Connector [12 Pin]

Connect to Interface Box



Note: Must be connected first, before power connection is made to the interface