

TV-Free
Video-in-motion Interface

CTVIMMS01

**for Maserati
Quattroporte
navigation systems**

Legal Information

By law, watching moving pictures while driving is prohibited, the driver must not be distracted. We do not accept any liability for material damage or personal injury resulting, directly or indirectly, from installation or operation of this product. This product should only be used while standing or to display fixed menus or rear-view-camera video when the vehicle is moving, for example the MP3 menu for DVD upgrades.

Contents

1. Prior to installation

- 1.1. Delivery contents
- 1.2. Check compatibility of vehicle and accessories
- 1.3. Setting the Dip-switches
- 1.4. Pin-assignments

2. Installation

3. Activation of the video-in-motion function

4. Specifications


1. Prior to installation

Read the manual prior to installation. Technical knowledge is necessary for installation. The place of installation must be free of moisture and away from heat sources.

1.1. Delivery contents

Take down the SW-version and HW-version of the interface boxes, and store this manual for support purposes.

HW _____ SW _____

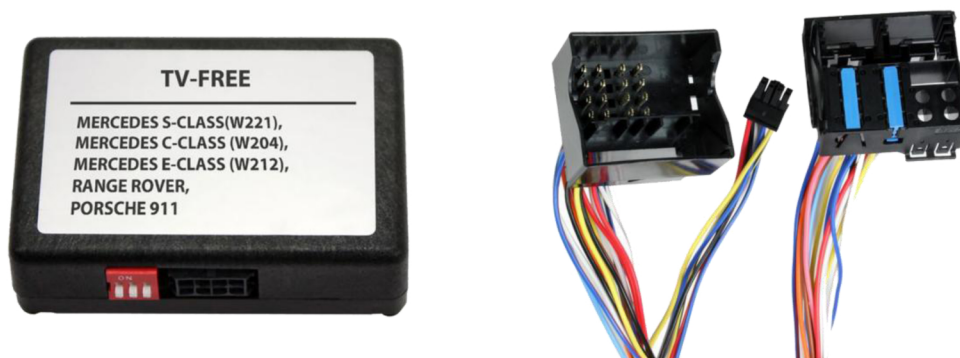

2. Installation

Switch off ignition and disconnect the vehicle's battery! If according to factory rules disconnecting the battery has to be avoided, it is usually sufficient to put the vehicle in sleep-mode. In case the sleep-mode does not show success, disconnect the battery with a resistor lead.

1. Remove decorative cover of the centre console by dismantling the clipped upper ventilation unit and loosening the two screws behind it. Remove the clipped lower cover next. Loosen the two lower screws of the decorative cover and pull out the whole centre console (Caution: The navigation computer is attached to the decorative cover).



2. Disconnect Quadlock connector from the backside of the navigation computer and connect it to harness supplied. If the original Quadlock connector carries 12pin inserts, disconnect the inserts and connect them to harness supplied. Connect interface to the navigation computer.



3. Activation of the video-in-motion function

The video-in-motion function is activated permanently without disturbing the navigation performance.

4. Specifications

Operation voltage	10.5 – 14.8V
Stand-by power drain	>1mA
Operation power drain	~60mA
Power consumption	~0,72W
Temperature range	-30°C to +80°C
Weight	44g
Measurements (box only) B x H x T	70 x 20 x 47 mm

